

# Luciole LED Emergency Lighting



## Specifications :


- 230V 50Hz - Class II
- battery NiMH 2.4V 2Ah
- Dimensions: 205 x 205 x 50mm
- Degree of protection IP31 - Optional IP65 (hermetic version)
- Load, Test and Alarm LED indicator
- Optional centralization through RS-485 bus or wireless IEEE802.15.4 2,4GHz.
- Compliant to EN 60598-8-22

## Features :

- 60lm/W - 3W - 180lm Permanent mode: can be switched off by remote control or switch
- Safety mode of 1 hour, optional 3 hours
- Easy installation without special tools.
- Automatic tests.
- Fully compatible with Centrunit Centralized
- Emergency Lighting Management system for data logging, monitoring, testing and maintenance, minimizing the maintenance costs
- IR remote control
- Recessed and surface mounted versions
- 3 available optics: anti-panic, escape route, spot
- Waterproof Model IP65 also available



Mini Luciole Version

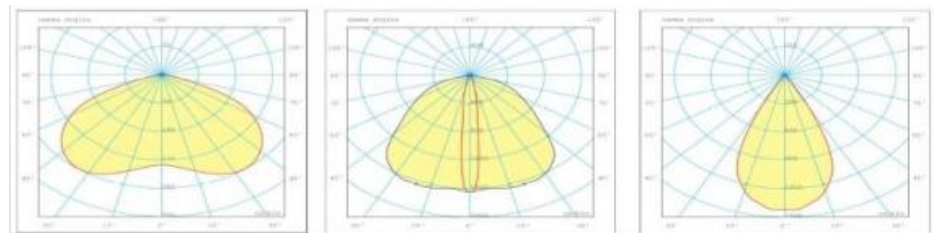

Anti-Panic

Escape Route

Spot